



各部主要寸法【標準モータシリーズ 脚取付形】


外形図1

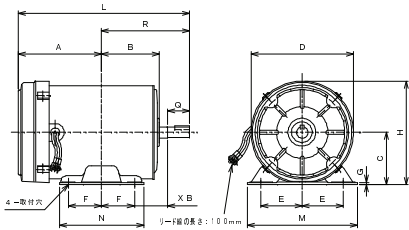


外形図2

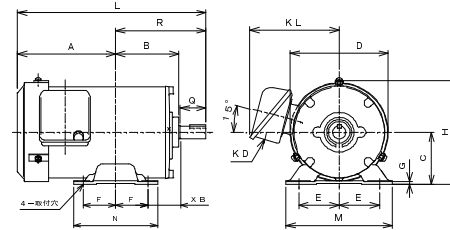



外形図3

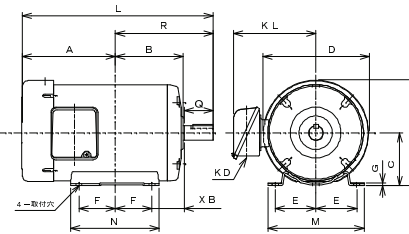



外形図4

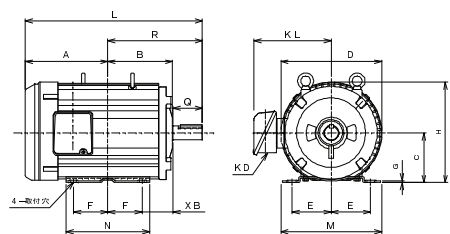

外形図5

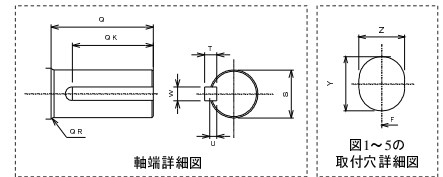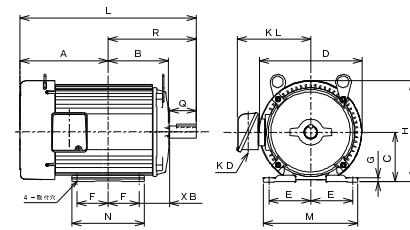

外形図6

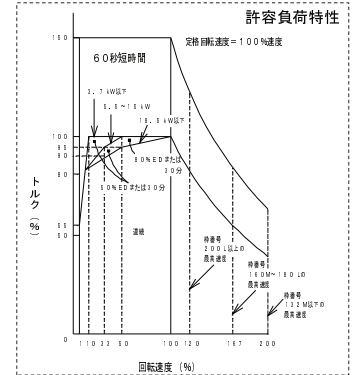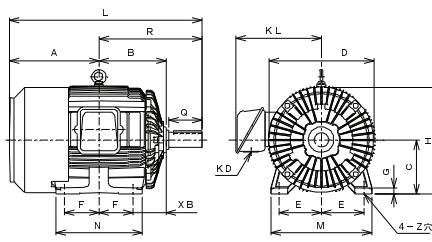

寸法諸元

| 出力 (kW) | | | 枠番号 | 図番 | A | B | C | D | E | F | G | H | KD | KL | L | M |
|---------|------|------|-------|----|-------|-------|-----|-----|-------|-------|-----|-------|----|-----|-----|-----|
| 2極 | 4極 | 6極 | | | | | | | | | | | | | | |
| 0.4 | 0.4 | — | 71M | 1 | 113 | 79 | 71 | 140 | 56 | 45 | 3.2 | 141 | 27 | 132 | 233 | 150 |
| — | — | 0.4 | 80M | 1 | 135 | 90 | 80 | 168 | 62.5 | 50 | 5 | 165 | 27 | 138 | 275 | 165 |
| 0.75 | 0.75 | — | 80M | 1 | 132 | 98 | 80 | 152 | 62.5 | 50 | 5 | 157.5 | 27 | 138 | 272 | 165 |
| 1.5 | — | — | 90L | 2 | 160.5 | 116.5 | 90 | 183 | 70 | 62.5 | 3.4 | 183 | 28 | 142 | 329 | 165 |
| 2.2 | 1.5 | 0.75 | | | | | | | | | | | | | | |
| — | 2.2 | — | 100L | 3 | 185 | 125 | 100 | 208 | 80 | 70 | 7 | 205 | 27 | 158 | 378 | 215 |
| — | — | 1.5 | | | | | | | | | | | | | | |
| 3.7 | 3.7 | — | 112M | 4 | 199 | 137 | 112 | 233 | 95 | 70 | 10 | 228 | 28 | 165 | 399 | 214 |
| — | — | 2.2 | | | | | | | | | | | | | | |
| 5.5 | — | — | 132S | 5 | 212 | 156 | 132 | 275 | 108 | 70 | 16 | 269 | 35 | 200 | 451 | 243 |
| 7.5 | 5.5 | — | | | | | | | | | | | | | | |
| — | — | 3.7 | 132M | 5 | 250 | 156 | 132 | 275 | 108 | 70 | 16 | 269 | 35 | 200 | 489 | 243 |
| — | 7.5 | — | | | | | | | | | | | | | | |
| — | — | 5.5 | 160M | 6 | 307 | 175 | 132 | 275 | 108 | 89 | 16 | 269 | 35 | 200 | 565 | 243 |
| 11 | 11 | 7.5 | | | | | | | | | | | | | | |
| 15 | — | — | 160L | 6 | 269 | 210 | 160 | 330 | 127 | 105 | 18 | 325 | 45 | 230 | 592 | 291 |
| 18.5 | 15 | 11 | | | | | | | | | | | | | | |
| 22 | 18.5 | — | 180M | 7 | 291 | 235 | 160 | 330 | 127 | 127 | 18 | 325 | 45 | 230 | 636 | 291 |
| — | 22 | 15 | | | | | | | | | | | | | | |
| 30 | 30 | 18.5 | 180L | 7 | 356.5 | 230 | 180 | 390 | 139.5 | 120.5 | 18 | 375 | 56 | 330 | 708 | 330 |
| — | — | 22 | | | | | | | | | | | | | | |
| 37 | — | — | 200LB | 8 | 400.5 | 273.5 | 200 | 467 | 159 | 152.5 | 20 | 435 | 56 | 365 | 796 | 380 |
| 45 | — | — | | | | | | | | | | | | | | |
| — | 37 | 30 | 200L | 8 | 400.5 | 273.5 | 200 | 467 | 159 | 152.5 | 20 | 435 | 56 | 365 | 826 | 380 |
| — | 45 | 37 | | | | | | | | | | | | | | |
| 55 | — | — | 225SB | 9 | 454 | 280 | 225 | 467 | 178 | 143 | 25 | 460 | 56 | 365 | 856 | 426 |
| — | — | — | | | | | | | | | | | | | | |
| — | 55 | 45 | 225S | 9 | 454 | 280 | 225 | 467 | 178 | 143 | 25 | 460 | 56 | 365 | 886 | 426 |

(注) 1 軸端キー及びキー溝寸法は、JIS B 1301-1976「沈みキー及びキー溝」の並級によっています。キーは付属しています。
 2 軸端直径S寸法の仕上げ公差は、JIS B 0401「はめあい方式」によっています。
 3 リード線引き出し口は90度間隔で全方向に変えることができます。

寸法単位: mm

| N | R | XB | Y | Z | 軸端 | | | | | 概略質量 kg | | | | |
|-----|-------|-----|----|------|-----|-----|-----|------------------|----|---------|----|-----|-----|-----|
| | | | | | Q | QK | QR | S | T | U | W | 2極 | 4極 | 6極 |
| 115 | 120 | 45 | 20 | 7 | 30 | 20 | 0.5 | 14 ^{h6} | 5 | 3 | 5 | 12 | 12 | — |
| 130 | 140 | 50 | 25 | 10 | 40 | 25 | 0.5 | 19 ^{h6} | 6 | 3.5 | 6 | — | — | 20 |
| 130 | 140 | 50 | 25 | 10 | 40 | 25 | 0.5 | 19 ^{h6} | 6 | 3.5 | 6 | 16 | 16 | — |
| 152 | 168.5 | 56 | 16 | 10 | 50 | 35 | 0.5 | 24 ^{h6} | 7 | 4 | 8 | 14 | 19 | 19 |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 170 | 193 | 63 | 16 | 12 | 60 | 45 | 1 | 28 ^{h6} | 7 | 4 | 8 | — | 39 | — |
| 170 | 193 | 63 | 16 | 12 | 60 | 45 | 1 | 28 ^{h6} | 7 | 4 | 8 | — | — | 42 |
| 164 | 200 | 70 | 16 | 12 | 60 | 45 | 1 | 28 ^{h6} | 7 | 4 | 8 | 28 | 33 | — |
| 164 | 200 | 70 | 16 | 12 | 60 | 45 | 1 | 28 ^{h6} | 7 | 4 | 8 | — | — | 33 |
| 187 | 239 | 89 | 14 | 12 | 80 | 60 | 1 | 38 ^{h6} | 8 | 5 | 10 | 42 | 49 | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 187 | 239 | 89 | 14 | 12 | 80 | 60 | 1 | 38 ^{h6} | 8 | 5 | 10 | — | — | 49 |
| 226 | 258 | 89 | 14 | 12 | 80 | 60 | 1 | 38 ^{h6} | 8 | 5 | 10 | — | — | 56 |
| 226 | 258 | 89 | 14 | 12 | 80 | 60 | 1 | 38 ^{h6} | 8 | 5 | 10 | — | — | 56 |
| 273 | 323 | 108 | 17 | 14.5 | 110 | 90 | 0.5 | 42 ^{h6} | 8 | 5 | 12 | 84 | 91 | 81 |
| 318 | 345 | 108 | 17 | 14.5 | 110 | 90 | 0.5 | 42 ^{h6} | 8 | 5 | 12 | 107 | 102 | 102 |
| 290 | 351.5 | 121 | 17 | 14.5 | 110 | 90 | 2 | 48 ^{h6} | 9 | 5.5 | 14 | 185 | 190 | 200 |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 330 | 370.5 | 121 | 17 | 14.5 | 110 | 90 | 1.2 | 55 ^{m6} | 10 | 6 | 16 | 234 | 216 | 240 |
| 365 | 395.5 | 133 | 17 | 18.5 | 110 | 90 | 1.2 | 55 ^{m6} | 10 | 6 | 16 | 304 | 302 | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 365 | 425.5 | 133 | 17 | 18.5 | 140 | 120 | 0.5 | 60 ^{m6} | 11 | 7 | 18 | — | 322 | 323 |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 405 | 402 | 149 | 17 | 18.5 | 110 | 90 | 1.2 | 55 ^{m6} | 10 | 6 | 16 | 366 | — | — |
| 405 | 432 | 149 | 17 | 18.5 | 140 | 120 | 1 | 65 ^{m6} | 11 | 7 | 18 | — | 393 | 430 |

4 外形図は代表例で示しています。
 5 外形寸法は変更される場合がありますので、正確な外形寸法が必要な場合は必ずご照会ください。